



Contemp. eco!efficiency mode, easy 1-button operation, integrated tanks, built-in hose/cable storage, accessory compartment, large wheels and steering roller – welcome to the hot water compact class!



1 eco!efficiency mode

- Economical and environmentally friendly – even during longer periods of use.

3 Large tilting aid

- For easy tilting when negotiating obstacles such as steps and kerbs.

2 Large, rubber wheels and steering roller

- For exceptionally easy transport.

4 Large tank openings with integrated filling chute

- For easy filling.



HDS 5/12 C

- Economical ecoefficiency mode
- Intuitive one-button mode selection switch
- Entry level model in the compact class

Technical data

Order No.	1.272-200.0	
EAN code	4039784717633	
Current type	Ph / V / Hz	1 / 230 / 50
Flow rate	l/h	500
Pressure	bar / MPa	120 / 12
Max. temperature	°C	80
Connected load	kW	2.9
Heating oil consumption, full load	kg/h	3.2
Fuel tank	l	15
Weight	kg	86
Dimensions (L x W x H)	mm	1060 × 650 × 920
Detergent tank	l	10

Equipment

Spray gun	Extended easy-press trigger gun	
Spray gun with soft grip	■	
High-pressure hose	m	10 / DN 6, 250 bar
Spray lance	mm	550
Soft damping system (SDS)	■	
Pressure switch-off	■	
Integrated fuel and cleaning agent tank	■	

■ Included in delivery.

Accessories for HDS 5/12 C

1.272-200.0




		Order No.	ID	Max. working pressure	Length	Price	Description	
Standard with unions on both sides								
High-pressure hose, 10 m, ID 8, 315 bar, extension piece	1	6.391-342.0	DN 8 mm	315 bar	10 m			▲
High-pressure hose, 15 m, ID 8, 315 bar, including rotary coupling	2	6.390-010.0	DN 8 mm	315 bar	15 m			▲
High-pressure hose, 20 m, ID 8, 315 bar, extension piece	3	6.390-031.0	DN 8 mm	315 bar	20 m			▲
High-pressure hose, 30 m, ID 8, including rotary coupling	4	6.390-293.0	DN 8 mm	315 bar	30 m			▲
Longlife 400 with unions on both sides								
High pressure hose ID 6, 10 m, including rotary coupling	5	6.391-883.0	DN 6 mm	400 bar	10 m		With rotary coupling, 2 x M 22 x 1,5	▲
High-pressure hose Longlife 400, 10 m, ID 8, including rotary coupling	6	6.388-083.0	DN 8 mm	400 bar	10 m		10 m high-pressure hose Longlife 400 (DN 8) with rotary coupling, two layer high-strength steel wire reinforced. Connectors at both ends. M 22 x 1.5, with kink protection.	▲
Longlife 400 high-pressure hose, 10 m, DN 8, extension piece	7	6.391-354.0	DN 8 mm	400 bar	10 m			▲
High-pressure hose Longlife 400, 15 m, ID 8, including rotary coupling	8	6.389-709.0	DN 8 mm	400 bar	15 m		With rotary coupling, 2 x M 22 x 1.5	▲
High-pressure hose Longlife 400, 20 m, ID 8, extension	9	6.390-027.0	DN 8 mm	400 bar	20 m		with rotary coupling, 2 x M 22 x 1.5	▲
High-pressure hose Longlife 400, 30 m, ID 8, including rotary coupling	10	6.390-294.0	DN 8 mm	400 bar	30 m		With rotary coupling, 2 x M 22 x 1.5	▲
High-pressure hose 1.5 m, ID 8, including connectors	11	6.390-178.0	DN 8 mm	400 bar	1.5 m		1.5 m high-pressure hose (DN 8, M 22 x 1.5) with kink protection and connectors at both ends. For connecting to hose reels with appropriate connector (M 22 x 1.5).	□
Food industry version with unions on both sides								
High-pressure hose, 10 m, DN 8, suitable for the food industry, extension piece	12	6.389-479.0	DN 8 mm	250 bar	10 m		10 m high-pressure hose (DN 8) with patented (rotating) AVS trigger gun connector. Non-discolouring outer layer for use in the food industry. M 22 x 1.5 with anti-kink sleeve.	▲
High-pressure hose, 20 m, ID 8, suitable for food industry, extension piece	13	6.389-581.0	DN 8 mm	250 bar	20 m		20 m high-pressure hose (DN 8) with swivel coupling. Non-discolouring outer layer for use in the food industry. Connectors at both ends, M 22 x 1.5, with kink protection. NW 8/155°C/250 bar.	▲
Longlife food design with screw connections at both ends								
High pressure hose food ID 8, 10 m	14	6.391-864.0	DN 8 mm	400 bar	10 m		Longlife HP hose for use in the food industry. Außendecke## animal-grease-resistant, non-colour-bleeding material. With rotary coupling, 2 x M 22 x 1,5	▲
High-pressure hose food industry 400 bar, 20 m, ID 8, including rotary coupling	15	6.391-887.0	DN 8 mm	400 bar	20 m			▲
Standard								
High-pressure hose, 10 m, ID 6, AVS trigger gun connector	16	6.391-238.0	DN 6 mm	250 bar	10 m		10 m high-pressure hose (M 22 x 1.5) with kink protection. With patented rotating AVS trigger gun connector and manual coupling. Further data: DN 6/155°C/250 bar.	■
High-pressure hose, 10 m, ID 6, 300 bar, AVS trigger gun connection	17	6.391-875.0	DN 6 mm	300 bar	10 m		With patented AVS connection in the trigger gun (pivot-mounted) and hand screw union. M 22 x 1.5 with anti-kink protection. NW 6/155°C/300 bar	□
High-pressure hose, 10 m, ID 8, AVS trigger gun connector	18	6.390-025.0	DN 8 mm	315 bar	10 m		10 m high-pressure hose (M 22 x 1.5) with kink protection. With patented rotating AVS trigger gun connector and manual coupling. Further data: DN 8/155°C/315 bar.	□
High-pressure hose, 15 m, ID 8, AVS trigger gun connector	19	6.390-185.0	DN 8 mm	315 bar	15 m		15 m high-pressure hose (M 22 x 1.5) with kink protection. With patented rotating AVS trigger gun connector and manual coupling. Further data: DN 8/155°C/315 bar.	□

■ Included in delivery. □ Available accessories. ▲ Extension hose.

Accessories for HDS 5/12 C

1.272-200.0

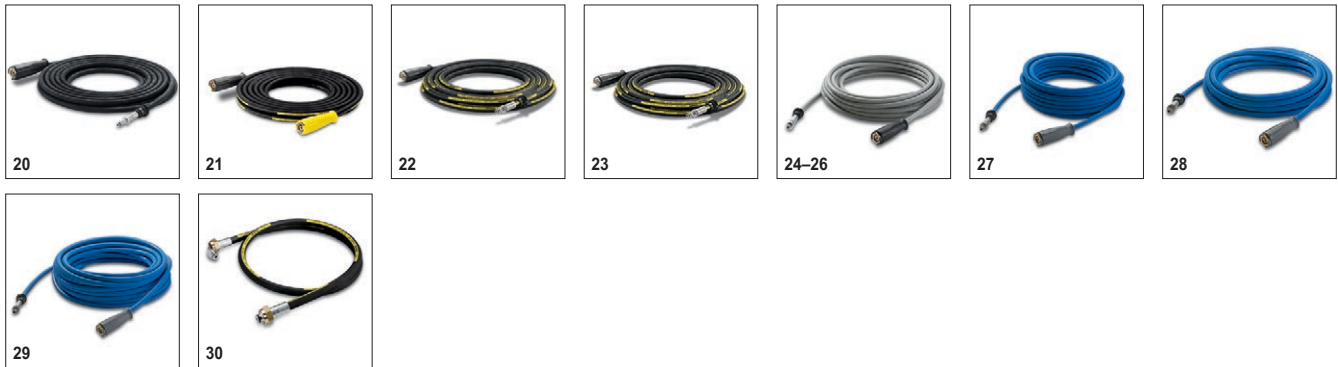

		Order No.	ID	Max. working pressure	Length	Price	Description	
High-pressure hose, 20 m, ID 8, AVS trigger gun connector	20	6.390-171.0	DN 8 mm	315 bar	20 m		20 m high-pressure hose (M 22 x 1.5) with kink protection. With patented rotating AVS trigger gun connector and manual coupling. Further data: DN 8/155°C/315 bar.	<input type="checkbox"/>
Longlife 400								
Longlife 400 high-pressure hose, 10 m, DN 6, M 22 x 1.5	21	6.391-882.0	DN 6 mm	400 bar	10 m		With patented AVS connection in the trigger gun (pivot-mounted).	<input type="checkbox"/>
Longlife 400 high-pressure hose, 10 m, DN 8,	22	6.391-351.0	DN 8 mm	400 bar	10 m			<input type="checkbox"/>
High-pressure hose Longlife 400, 20 m, DN 8, AVS trigger gun connector	23	6.390-208.0	DN 8 mm	400 bar	20 m		20 m high-pressure hose Longlife 400 (DN 8) with patented (rotating) AVS trigger gun connector and manual coupling. Two layer high-strength steel wire reinforced.	<input type="checkbox"/>
Food industry version								
High-pressure hose, 15 m, ID 6, AVS trigger gun connector 11 mm, suitable for food industry, grey	24	6.391-654.0	DN 6 mm	250 bar	15 m		15 m high-pressure hose (DN 6) with patented (rotating) AVS trigger gun connector. Non-discolouring outer layer for use in the food industry. DN 6/155°C/250 bar.	<input type="checkbox"/>
High-pressure hose, 10 m, DN 8, AVS trigger gun connection, food, grey	25	6.390-704.0	DN 8 mm	250 bar	10 m		Food industry version, AVS connection in the trigger gun. grey NW 8/155 °C/250 bar	<input type="checkbox"/>
High-pressure hose, 20 m, ID 8, AVS trigger gun connector, suitable for food industry, grey	26	6.390-705.0	DN 8 mm	250 bar	20 m		20 m high-pressure hose (DN 8) with patented (rotating) AVS trigger gun connector. Non-discolouring outer layer for use in the food industry. NW 8/155°C/250 bar.	<input type="checkbox"/>
Longlife food design								
High-pressure hose Longlife 400, 15 m, ID 6, AVS trigger gun connection	27	6.391-888.0	DN 6 mm	400 bar	15 m		Longlife HP hose for use in the food industry. Außendecke## animal-grease-resistant, non-colour-bleeding material. With patented AVS connection in the pistol (pivot mounted)	<input type="checkbox"/>
High-pressure hose Longlife 400, 10 m, ID 8, AVS trigger gun connection	28	6.391-885.0	DN 8 mm	400 bar	10 m			<input type="checkbox"/>
High-pressure hose Longlife 400, 20 m, ID 8, AVS trigger gun connection	29	6.391-886.0	DN 8 mm	400 bar	20 m			<input type="checkbox"/>
Special hoses								
High-pressure hose 1.5 m, ID 8, including connectors, outlet bend	30	6.388-886.0	DN 8 mm	400 bar	1.5 m			<input type="checkbox"/>

■ Included in delivery. □ Available accessories. ▲ Extension hose.


Accessories for HDS 5/12 C 1.272-200.0



		Order No.	Max. working pressure	Nozzle size			Price	Description	
Triple nozzles									
Triple nozzle 034	1	4.767-147.0	300 bar	34				Triple nozzle with manual nozzle changeover. Convenient spray adjustment. For high-pressure cleaners with injector; low-pressure fan jet for detergent removal and application. Connector M 18x1.5.	■
Dirt Blaster, small									
Dirt blaster	2	4.767-022.0	180 bar	35				Small rotary nozzle for dirt blaster. The rotating point jet achieves 10 times the cleaning performance. Outstanding working time thanks to ceramic nozzle and bearing ring. Max. 180 bar/18 MPa, 60°C.	□
Dirt blaster, large									
Dirt blaster – without changeover function	3	4.763-931.0	300 bar	35				The dirt blaster with rotating pencil jet offers 10 times better cleaning performance. Ceramic nozzle and bearing ring for a long service life. Further data: Max. 300 bar, 30 MPa, 85°C.	□

■ Included in delivery. □ Available accessories. ▲ Extension hose.

Accessories for HDS 5/12 C 1.272-200.0

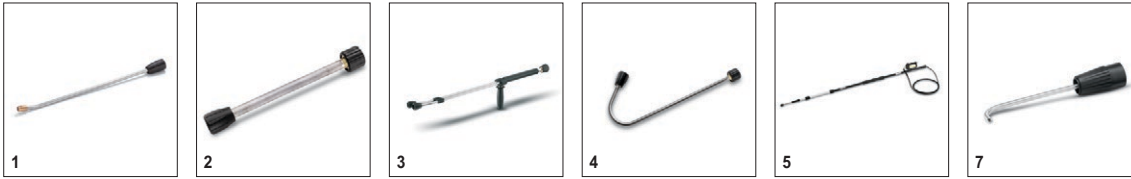

		Order No.	Max. working pressure	Length		Price	Description	
Spray lance								
550 mm lance, non-rotatable	1	4.760-665.0		550 mm			550 mm stainless steel lance. With manual coupling. Non-rotatable.	■
250 mm lance, non-rotatable	2	4.760-667.0		250 mm			250 mm stainless steel lance. With manual coupling. Non-rotatable.	□
Double lance								
Double lance 960 mm	3	6.394-665.0	310 bar	960 mm			960 mm double lance for variable pressure adjustment on handle at full water flow rate. Suitable for agricultural use (e.g. stable cleaning).	□
Angular spray lance								
Spray lance for toilets and rain gutters	4	4.760-073.0					Stainless steel lance WC and gutter with nozzle insert. Specially shaped for effective and hygienic cleaning of gutters and toilets.	□
Telescopic spray lance								
Telescopic spray pipe	5	6.394-690.0	225 bar					□
Strap for telescopic spray pipe	6	6.373-987.0					Convenient strap for relief when working with the telescopic spray lance (6.394-690). The burden is optimally distributed on the body and longer periods of use are possible.	□
Gutter cleaner								
Gutter cleaning lance	7	2.642-305.0					The lance is suited for cleaning of gutter systems. Because of the shape of the lance and the special nozzle the gutter can be cleaned without removing the cover plates.	□

■ Included in delivery. □ Available accessories. ▲ Extension hose.


Accessories for HDS 5/12 C 1.272-200.0



		Order No.	Flow rate					Price	Description	
Easy Press high-pressure trigger gun with holding force reduction (Kärcher patent)										
Extended Easy Press trigger gun	1	4.775-529.0							Extended easy press high-pressure trigger gun for high-pressure hoses with rotating connector.	■
Easy Press HP trigger gun with soft grip	2	4.775-463.0							Easy press high-pressure trigger gun with softgrip. For high-pressure hoses DN 6 and DN 8 with 11 mm swivel diameter.	□
Trigger guns										
High-end HP trigger gun	3	4.775-823.0								□
Quick connect										
Quick coupling	4	6.401-458.0							For quick change of different spray lances and accessories. Optimum adaption to Kärcher accessories, especially for connection between trigger gun and spray lance. With M22 x 1,5 female.	□
Male coupling	5	6.401-459.0							Hardened stainless steel nipple for quick coupling 6.401-458. With M22 x 1,5 male.	□

■ Included in delivery. □ Available accessories. ▲ Extension hose.


Accessories for HDS 5/12 C 1.272-200.0

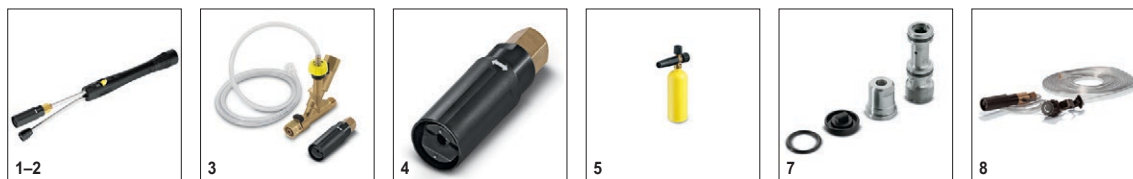

		Order No.	Flow rate				Price	Description	
Inno Foam Kit									
Inno Foam Set with detergent injector	1	2.640-151.0						High-pressure foam system with double lance (foam nozzle and high-pressure jet for rinsing). For use with mobile and stationary high-pressure and HDS pressure cleaners for cleaning or disinfection.	<input type="checkbox"/>
Inno Foam Set	2	2.640-692.0							<input type="checkbox"/>
Easy Foam Set									
Easy Foam Set with RM injector	3	2.640-691.0						HP foam system for use with HD/HDS units for cleaning and disinfecting. Foam nozzle for connection to lance and HP chemical injector with precision 0-5% metering valve. The machine specific nozzle kit has to be ordered separately.	<input type="checkbox"/>
Easy Foam Set	4	2.640-693.0							<input type="checkbox"/>
Cup foam lance									
Cup foam lance	5	6.394-668.0	1200 l/h					Short, handy foam lance with adjustable spray angle with 1 litre detergent tank. Ideal for cleaning cars due to its compact design.	<input type="checkbox"/>
1-litre cleaning agent container for foam lance	6	6.414-954.0							<input type="checkbox"/>
Nozzle kits for Inno/Easy Foam Set									
Nozzle kit 055 for Inno / Easy Set 500-600 l/h	7	2.640-870.0	500-600 l/h					Optimal adaptation to different machine outputs for economic use.	<input type="checkbox"/>
Foam nozzle mounting kit									
Foam nozzle attachment kit	8	2.637-926.0						Foaming agent kit. The foam nozzle is ideal for use in sanitary areas and the food industry and wherever long application times are necessary.	<input type="checkbox"/>

■ Included in delivery. □ Available accessories. ▲ Extension hose.

Accessories for HDS 5/12 C 1.272-200.0

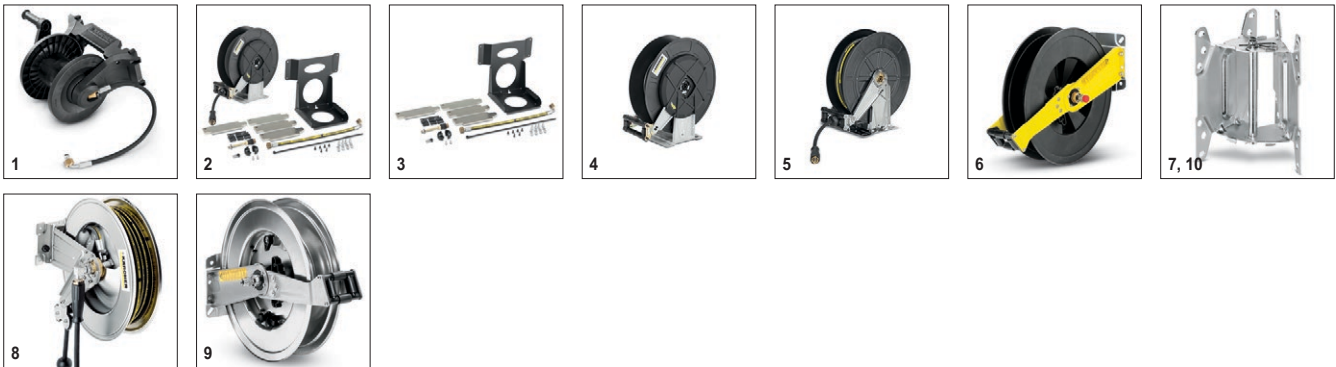

		Order No.	Length				Price	Description	
Manual hose reel attachment kit									
Hose reel attachment kit, plastic, for HDS compact class	1	2.642-756.0	20 m						<input type="checkbox"/>
Automatic, self-winding hose reels									
ABS automatic hose drum HDS C	2	2.643-052.0	20 m						<input type="checkbox"/>
ABS holder, automatic hose drum HDS C	3	2.643-181.0							<input type="checkbox"/>
Automatic hose reel, powder-coated steel / plastic	4	6.392-975.0	20 m					Automatic hose reel for 20 m high-pressure hose. The console is made from powder-coated steel, the drum is made from plastic.	<input type="checkbox"/>
Automatic stainless steel / synthetic material hose drum	5	6.392-965.0	20 m					Automatic hose reel for 20 m high-pressure hose. The console consists of stainless steel, the drum is made from plastic.	<input type="checkbox"/>
Automatic hose reel, coated	6	2.639-919.0	20 m					Automatic hose reel of durable plastic. Painted steel bracket. Suitable for 20 m high-pressure hose.	<input type="checkbox"/>
Powder-coated swivel holder	7	2.639-931.0						Swivel holder for automatic hose reel wall mounting. For maximum action radius and flexibility of high-pressure hose. Rotatable 120°. Galvanised steel.	<input type="checkbox"/>
Automatic hose reel, stainless steel, includes swivel holder	8	6.391-421.0	20 m					Automatic stainless steel hose reel. With swivel holder. Suitable for 20 m high-pressure hose.	<input type="checkbox"/>
ABS automatic stainless steel hose drum	9	2.641-866.0	20 m					High-grade, automatic steel hose reel. Especially suitable for use in the food industry. The material and finish provide for a corrosion-resistant, watertight capsuled sprong drive. Connection for HP hoses with nipple.	<input type="checkbox"/>
ABS pivoting stainless steel wall bracket	10	2.641-867.0						Swivelling wall bracket made of high-grade steel (for 2.641-866). This makes maximum flexibility and convenience possible when working with the HP hose.	<input type="checkbox"/>

■ Included in delivery. □ Available accessories. ▲ Extension hose.

Accessories for HDS 5/12 C

1.272-200.0



		Order No.						Price	Description	
Cleaning agent injector										
Cleaning agent injector for high pressure (without nozzle)	1	3.637-170.0							Cleaning agent dosage at high pressure 3 - 5 %	<input type="checkbox"/>
Cleaning agent injector for high and low pressure (without nozzles)	2	3.637-001.0							Detergent injector for independent high and low pressure dosage. Maximum dosage about 15%.	<input type="checkbox"/>
Machine-specific nozzle kit with order no. 3.637-170.0										
Machine-specific nozzle kit with order no. 3.637-170, HDS 500-700 l/h	3	4.769-046.0							For HDS 500 - 700 l/h. Consists of nozzle insert + HP power nozzle + union	<input type="checkbox"/>
Nozzle insert with order no. 3.637-001.0										
Nozzle insert with order no. 3.637-001.0, high pressure for machines up to 1,100 l/h	4	4.769-003.0							Nozzle insert for detergent injector 3.637-001 for high-pressure detergent application. For high-pressure cleaners with a water flow rate up to 1100 l/h.	<input type="checkbox"/>
Nozzle insert with order no. 3.637-001, low pressure for devices up to 1,100 l/h	5	4.769-001.0							For low pressure with machines up to 1.100 l/h	<input type="checkbox"/>
Nozzle union										
Nozzle connector	6	5.401-210.0							For protecting and connecting Kärcher power nozzles to spray lances (M 18 x 1.5 IG).	<input type="checkbox"/>
Nozzle union food industry	7	5.401-318.0							Made of special brass alloy for use in the food industry.	<input type="checkbox"/>
Spacer (including nozzle union)										
Spacer (includes nozzle screws)	8	5.394-294.0							Guarantees constant safety clearance, e.g. for tyres and bodywork. Helps prevent damage to sensitive surfaces. Mounts directly to lance.	<input type="checkbox"/>
Rotary coupling										
Rotary coupling	9	4.401-091.0							Kärcher rotary coupling prevents twisting and kinking of high-pressure hoses for ease of use. Connector M 22 x 1.5 m. With grip protection.	<input type="checkbox"/>
Coupling										
Coupling	10	4.403-002.0							Brass double connector for connecting and extending high-pressure hoses. With rubber protection. Connector: 2x M 22 x 1.5 m.	<input type="checkbox"/>
Connector										
Nozzle screws / screw socket	11	4.402-022.0							Nozzle connector/screw connector for connecting high-pressure nozzles and accessories to the high-pressure trigger gun (with nozzle connector). Connectors: 1x M 22 x 1.5 and 1x M 18 x 1.5.	<input type="checkbox"/>
Adapters										
Adapter M 22 – Swivel	12	4.424-004.0							M22 x 1,5female and swivel connection. For extension of high-pressure hoses with AVS connection or for usage of the telescopic lance with a high-pressure hose with AVS connection.	<input type="checkbox"/>
Flue pipe										
Flue gas adapter	13	4.656-149.0							Flue gas adapter with draught damper for flue pipe connection (adapter for HDS burners for connection to a stack system).	<input type="checkbox"/>
	14	4.656-080.0						<input type="checkbox"/>		

■ Included in delivery. □ Available accessories. ▲ Extension hose.

Accessories for HDS 5/12 C 1.272-200.0



1



2

		Order No.					Price	Description	
Crane lifting kit									
Crane loading attachment kit for HDS compact class	1	2.642-638.0							<input type="checkbox"/>
Flame monitoring attachment kit									
Flame monitoring attachment kit for HDS compact class	2	2.642-711.0							<input type="checkbox"/>

■ Included in delivery. □ Available accessories. ▲ Extension hose.


Accessories for HDS 5/12 C 1.272-200.0



		Order No.	Flow rate	Nozzle size	Diameter	Price	Description	
FR Basic surface cleaner								
FR Basic surface cleaner	1	2.642-998.0			300 mm		FR Basic: entry level model for splash-free cleaning of surfaces indoors and outdoors. Plastic casing and simple ceramic bearing. Includes nozzle kit. Max. 180 bar, 600 l/h, 60°C.	<input type="checkbox"/>
Hard surface cleaner FR 30								
Hard surface cleaner FR 30	2	2.642-997.0			300 mm			<input type="checkbox"/>
FR 30 Me surface cleaner								
Hard surface cleaner FR 30 Me	3	2.640-355.0			300 mm		Hot water resistant stainless steel surface cleaner with double ceramic bearings, non-marking swivel castors and suction hose connection. Ideal for indoor cleaning, e.g. food industry.	<input type="checkbox"/>
Machine-specific nozzle kits for FR								
Nozzle kit for surface cleaners	4	2.640-482.0	450-500 l/h				Nozzle kit includes power nozzles and unions. For Kärcher surface cleaners (450 to 500 l/h).	<input type="checkbox"/>

■ Included in delivery. □ Available accessories. ▲ Extension hose.

Accessories for HDS 5/12 C 1.272-200.0

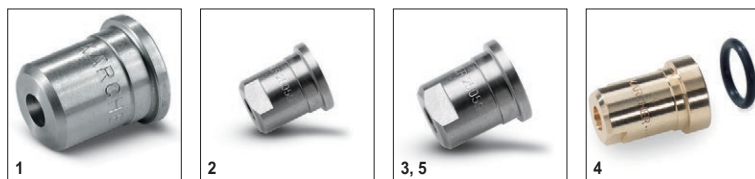

		Order No.	Nozzle size				Price	Description	
HP nozzle spray angle 0°									
High-pressure nozzle spray angle 0°	1	2.884-533.0	40					High-pressure nozzle with powerful jet for extremely stubborn dirt.	<input type="checkbox"/>
Power nozzle spray angle 15°									
Power nozzle spray angle 15°	2	2.885-224.0	34						<input type="checkbox"/>
Power nozzle spray angle 25°									
Power nozzle spray angle 25°	3	2.883-803.0	34					Fan jet nozzle with 25° spray angle, suitable for large areas and removing stubborn dirt and stains.	<input type="checkbox"/>
25° power nozzle for applying cleaning agent	4	2.884-521.0	250						<input type="checkbox"/>
Power nozzle spray angle 40°									
Power nozzle spray angle 40°	5	2.884-522.0	40					Power nozzle with a 40° spray angle and fan jet, suitable for large areas and sensitive surfaces.	<input type="checkbox"/>

■ Included in delivery. □ Available accessories. ▲ Extension hose.


Accessories for HDS 5/12 C 1.272-200.0



		Order No.	Nozzle size				Price	Description	
Wet blasting attachment (without nozzle)									
Wet blasting attachment with flow control (without nozzles)	1	4.762-010.0						Paint, rust and scale removal made easy: Kärcher wet blasting attachment with flow control for adding blasting abrasive to the high-pressure jet.	<input type="checkbox"/>
Wet blasting attachment without flow control (nozzles not included)	2	4.762-022.0						Paint, rust and scale removal made easy: Kärcher wet blasting attachment with flow control for adding blasting abrasive to the high-pressure jet. Without flow control.	<input type="checkbox"/>
Nozzle kits for wet jet unit									
Nozzle kit for wet jet unit 035	3	2.638-526.0	35					Nozzle kit with wet blasting nozzle and nozzle insert (type specific). For optimal Kärcher wet blasting attachment performance. Only in combination with wet blasting attachment 4.762-010/-022.	<input type="checkbox"/>
Boron carbide nozzle									
Boron carbide nozzle, for machines up to 1,000 l/h	4	6.415-084.0	6 mm					In addition to nozzle packs. Very wear-resistant nozzle with boron carbide chuck for continuous-duty operation.	<input type="checkbox"/>

■ Included in delivery. □ Available accessories. ▲ Extension hose.

Accessories for HDS 5/12 C 1.272-200.0

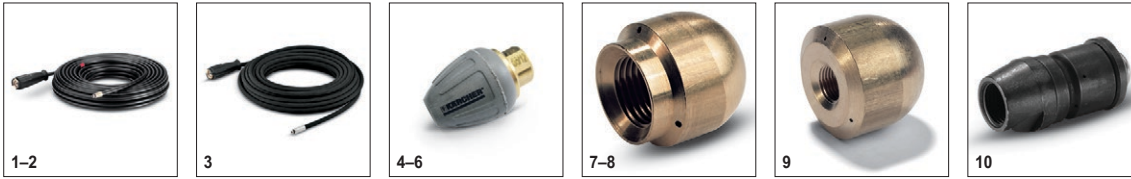


		Order No.	Max. working pressure	Nozzle size	Diameter	Price	Description	
Pipe cleaning hose, ID 6								
Pipe cleaning hose, NW 6, 20 m	1	6.390-028.0	120 bar				The 20 m pipe cleaning hose is a highly flexible high pressure hose for pipe interior cleaning (threaded connection for nozzle R 1/8).	<input type="checkbox"/>
Pipe cleaning hose, ID 6, 30 m	2	6.390-029.0	120 bar				30 m flexible high-pressure hose (DN 6) for cleaning pipes (threaded connection for R 1/8 nozzle).	<input type="checkbox"/>
Pipe cleaning hose, NW 6, 20 m, 250 bar	3	6.390-030.0	250 bar				The 20 m pipe cleaning hose is a highly flexible high pressure hose for pipe interior cleaning (threaded connection for nozzle R 1/8).	<input type="checkbox"/>
Pipe cleaning nozzle								
Pipe cleaning dirt blaster D 25 / 040	4	6.415-944.0		40	25 mm		The forward-tilted rotating pencil jet removes the most stubborn dirt. The three backwards-tilted jets ensure the necessary forward movement, as well as convenient handling.	<input type="checkbox"/>
Pipe cleaning dirt blaster D 30 / 040	5	6.415-946.0		40	30 mm			<input type="checkbox"/>
Pipe cleaning dirt blaster D 35 / 040	6	6.415-948.0		40	35 mm			<input type="checkbox"/>
Pipe cleaning nozzle	7	5.763-015.0		55	16 mm		16 mm pipe cleaning nozzle with internal thread. Various jet directions for environmentally-friendly cleaning of blocked drains and pipes.	<input type="checkbox"/>
	8	5.763-016.0		60	16 mm			<input type="checkbox"/>
	9	5.763-017.0		50	30 mm		Pipe cleaning nozzle with inner thread. Different spray directions. The hose moves freely through the pipe. (R 1/8" connection, 3 x 30° backwards, diameter 30 mm.)	<input type="checkbox"/>
Rotating pipe cleaning nozzle	10	6.415-428.0		50	16 mm		Pipe cleaning nozzle with four rotating jets and inner thread. Different spray directions. The hose moves freely through the pipe. With R 1/8" connection.	<input type="checkbox"/>

■ Included in delivery. □ Available accessories. ▲ Extension hose.

Accessories for HDS 5/12 C

1.272-200.0

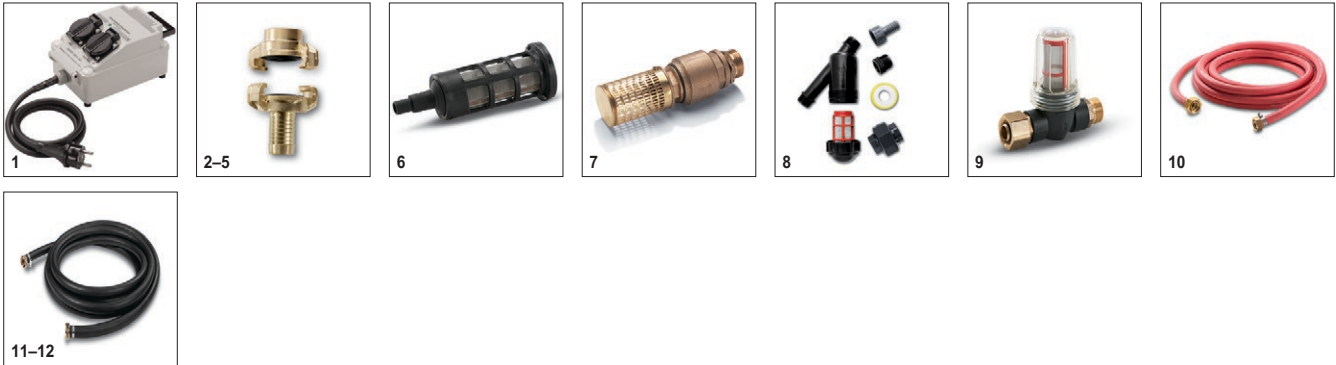

		Order No.	Length	Diameter		Price	Description	
Starting current limiter								
Starting current limiter	1	2.637-495.0					Reduces starting current in single-phase supply and protects line fuse.	<input type="checkbox"/>
Geka coupling								
Geka connector with hose barb, R 1/2"	2	6.388-461.0					with hose liner	<input type="checkbox"/>
Geka connector with hose barb, R 3/4"	3	6.388-455.0						<input type="checkbox"/>
Geka connector with hose barb, R 1"	4	6.388-465.0						<input type="checkbox"/>
Geka connector with inner thread, R 1"	5	6.388-458.0					with female thread	<input type="checkbox"/>
Suction filter								
Water suction filter	6	6.414-956.0						<input type="checkbox"/>
Suction filter with check valve	7	4.730-012.0					Brass suction filter suitable for ponds, storage tanks, etc. With check valve.	<input type="checkbox"/>
Water fine filter								
Water fine filter, with adapter	8	4.730-102.0					Fine-mesh water filter, 125 µm, max. temperature 50°C. Protects the high-pressure cleaner from dirt particles contained in the water. Water flow rate up to 1200 l/h. Connection 3/4", with adapter, 1".	<input type="checkbox"/>
Water fine filter, 100 µm, R 1"	9	2.638-270.0					Fine-mesh water filter, 100 µm, max. temperature 60°C. Connects to high-pressure cleaner. Protects the high-pressure cleaner from dirt particles contained in the water. Water flow rate up to 1200 l/h. Connector 1".	<input type="checkbox"/>
Water supply hose								
Water supply hose	10	4.440-038.0	7.5 m				NW 13 R1" / R 3/4", up to 30 °C	<input type="checkbox"/>
	11	4.440-207.0	7.5 m				NW 19 R1" / R 3/4", up to 85 °C, for pick-up	<input type="checkbox"/>
	12	4.440-270.0	7.5 m				NW 19 R1" / R1", up to 85 °C	<input type="checkbox"/>

■ Included in delivery. □ Available accessories. ▲ Extension hose.

Accessories for HDS 5/12 C 1.272-200.0



		Order No.	Flow rate				Price	Description	
Push-on washing brush									
Push-on washing brush	1	4.762-016.0						Push-on wash brush for universal use. Simply push on to lance. Connector: M 18 x 1.6.	<input type="checkbox"/>
Push-on wash brush	2	4.762-497.0						The wash brush is fitted directly onto the devices' new dual and triple nozzles using clamping.	<input type="checkbox"/>
Rotating washing brush									
Rotating wash brush for < 800 l/h machines, natural hair bristles	3	4.762-560.0	500-800 l/h						<input type="checkbox"/>
Rotating wash brush for < 800 l/h machines, nylon bristles	4	4.762-561.0	500-800 l/h					The rotating wash brush gently removes fine dust and grime from all surfaces. Heat-resistant up to 80°C. (M 18 x 1.5, replaceable brush insert).	<input type="checkbox"/>

■ Included in delivery. □ Available accessories. ▲ Extension hose.